


The JAF PRE top-media replacement is a replaceable media to help extend the life of the panel filters with and reduce replacement of the panels.

Consists of 100% non-woven polyester fibers that are bonded together. The pre-cut pads are engineered for single or multi-ply grades and are available dry or treated with non-toxic, non-migratory, odorless adhesive that is incorporated in the fiber media.


## Performance

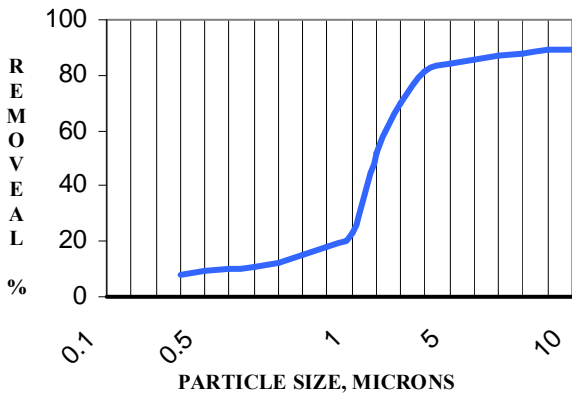

## Material Notes

- 100% Non-woven polyester
- 10 Nominal thickness
- Fire retarding bonding agent
- Dual denier fiber configuration
- 92% Average arrestance eff.
- U.L. class 2

*\*For Custom Engineered Products and Solutions... Consult Factory*

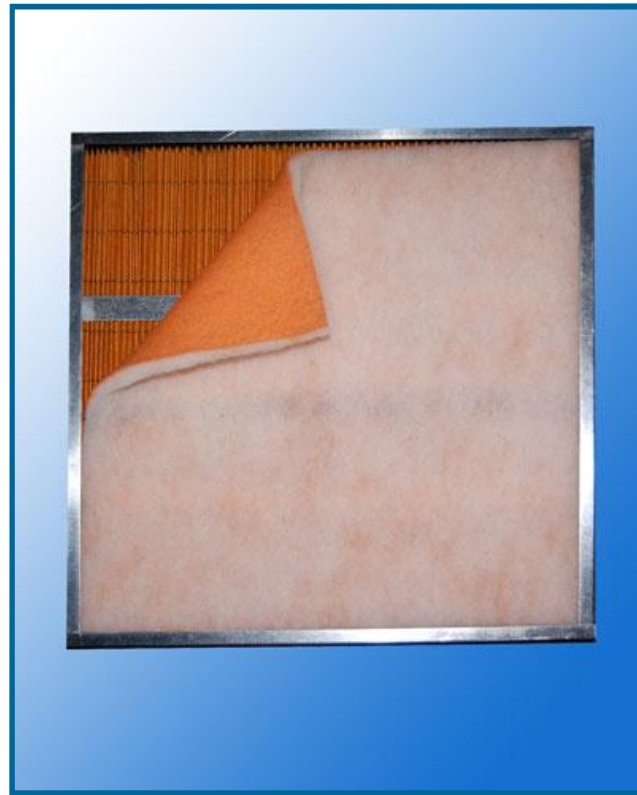

*JAF PRE 2 Panel Pad Replacements*

## Pressure Drop

FPM	Inches of Water
250	0.14
300	0.19
350	0.24
400	0.31
450	0.36
500	0.41

*\* Above are standard test filter drop on 24"x24"*